



## DIMENSIONS

66" x 40" x 23" (1676 x 1016 x 584 mm) Whirlpool Operating Gallons = 65 (Liters = 246) Gallon to Overflow = 95 (Liters = 360)

## MATERIAL

Polymer Composite

### **TUB FLOOR**

Non - Textured

## UNDERMOUNT:

This tub is not designed for undermount installation.

# **APPROVALS & COMPLIANCE**



Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- ANSI Z124.1 ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.


## STANDARD EQUIPMENT

• Adjustable leveling legs.




# AMERICH. ATLAS™6640


# **BATHING SYSTEMS**



**Builder Series** 



**Platinum Series** 




Airbath System II

### **OPTIONAL ACCESSORIES**

- Chromatherapy
- Grab Bars: 9" 14" 16"
- High Density Insulation
- iBath Sound System
- Inline Heater (whirlpool only)
- Jets: Additional or Rotary
- Ozone System (whirlpool and/or Airbath only)
- Pillows: 12" Angle
- Remote Control Upgrade (select series only)
- Serenity Soak (tub only)
- Thermal Comfort System (TCS cannot be used with VSM)
- Trim Kit Upgrade
- Vibro Sonic Massage (VSM cannot be used with TCS)
- Waste & Overflows Upgrades
  Linear Waste & Overflow

# (\*) STANDARD ON PLATINUM SERIES

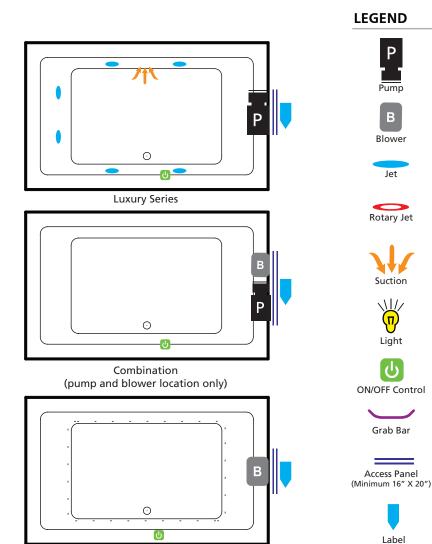

### **INSTALLATION TIPS**

Airbath System V

- 1. Install according to Owner's Manual and local codes.
- 2. Always consult your local plumber for recommendations as installations will vary.
- 3. The bath must be secured to the floor by applying a bead of silicone around the base (which can be cut in future should there be a need to access to the plumbing).
- 4. Installation must be carried out according to the manufacturer instructions.
- 5. Hot water supply should be 65-75% of tub capacity or greater.

### **ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.