Features

- Available in 27 finishes including 12 PVD finishes
- All brass construction
- 100°F safety stop button with manual override
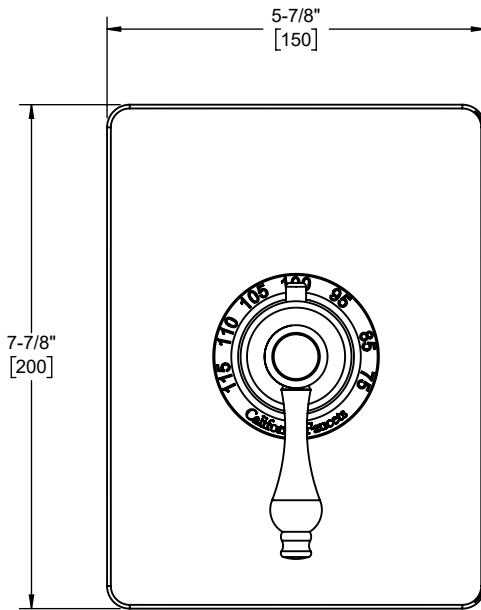- Engraved brass temperature ring
- Separate volume control required

TO-THCN-61 shown

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
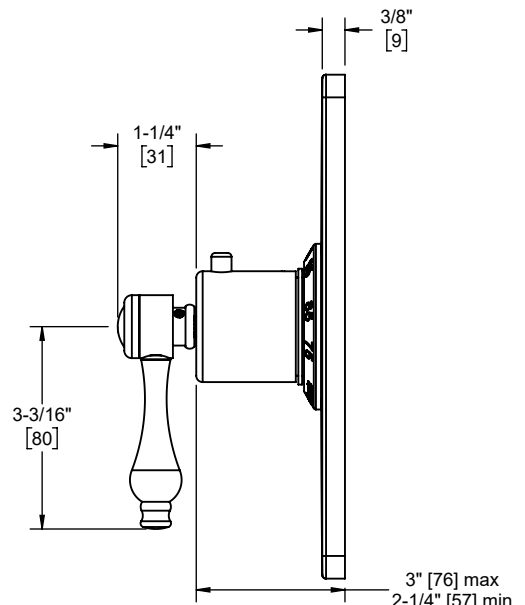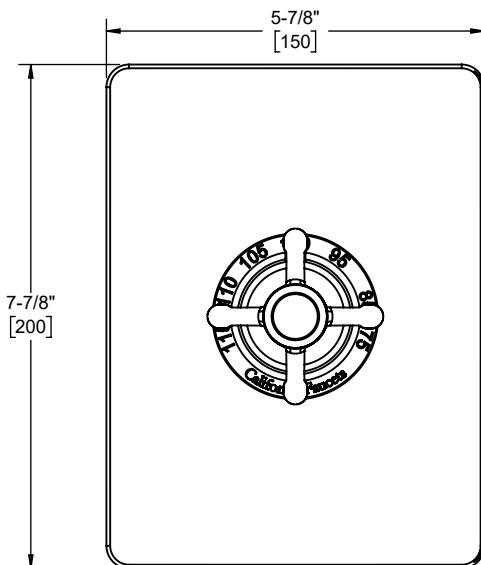- ASSE 1016
- ADA compliant (with lever handles)

c ICC ES PMG

5-7/8" [150]

7-7/8" [200]

TO-THCN-61 front view

3/8" [9]

1-1/4" [31]

3-3/16" [80]

3" [76] max
2-1/4" [57] min

TO-THCN-61 side view

5-7/8" [150]

7-7/8" [200]

TO-THCN-61XD front view

1-9/16" [39]

2-3/4" [70]

TO-THCN-61XD side view

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]
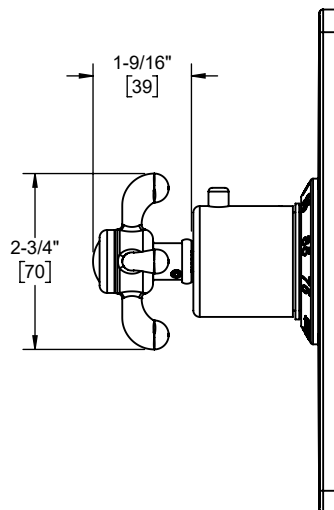
Specifications subject to change without notice