149-123 **QUANTUM**®

MANSFIELD®

Elongated Front, Pressure-Assist, Rear Outlet, Floor-Mount, Vitreous China, Two-Piece Toilet

FEATURES

- High performance, pressure-assist Flushmate III™ system
- 1.6 gpf / 6.0 lpf low water consumption
- · Elongated front, floor-mount, rear outlet bowl
- · Model 45 chrome-plated, metal trip lever
- 1-7/8' glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- · Available in White, Biscuit and Bone



COMPONENTS

| MODEL # | DESCRIPTION | CODES/STANDARDS | | |
|--------------------|---|-----------------|--|--|
| 149-123 | Elongated front, floor-mount, rear outlet, pressure-assist, two-piece toilet. Includes tank trim. Less toilet seat and supply. Specify color. | | | |
| 149 | Elongated front, rear outlet, floor-mount, pressure-assist bowl only. Less toilet seat and supply. Specify color. | | | |
| 123 | Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color. | | | |
| TANK OPTIONS C *** | | | | |
| 123RH | Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color. | | | |
| 122 | Pressure-assist tank and cover only with chrome-plated, plastic push button actuator. Less supply. Specify color. | | | |
| TANK TRIM & RE | TANK TRIM & REPLACEMENT PARTS | | | |
| 45 | Trip lever - chrome-plated, metal trip lever, left hand | | | |
| 125-LID | Tank lid | | | |
| FLUSHMATE® 503 | Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460. | | | |



149-123 **QUANTUM**®

MANSFIELD®

Elongated Front, Pressure-Assist, Rear Outlet, Floor-Mount, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


| MODEL # | DESCRIPTION | CODES/STANDARDS |
|---------|--|-----------------|
| 149-123 | Elongated front, rear outlet, floor-mount (1.6 gpf / 6.0 lpf) two-piece toilet | C ® |

| MATERIAL | Vitreous China |
|----------------------|------------------------------------|
| WATER PRESSURE RANGE | 35 to 80 PSI |
| FLUSH SYSTEM | Flushmate III™ flushing technology |
| WATER USAGE | 1.6 gpf / 6.0 lpf |
| WATER SURFACE AREA | 9-7/8' X 12-1/4' |
| ROUGH-IN | Rear outlet |
| MAP RATING | Pending |

| TRAP DIAMETER | 1-7/8' |
|-----------------|--|
| TRAP SEAL | 2-3/4' |
| SHIPPING WEIGHT | Model 149 - 60 lbs. (27.2 kg) Model 123 - 41 lbs. (18.5 kg) |
| WARRANTY | Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate) |

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

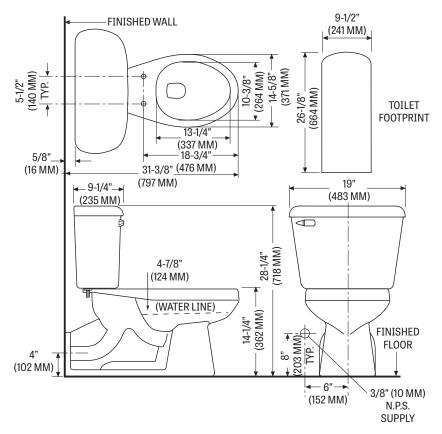

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

