

Features

- Framed
- 1/8" glass
- Towel bar
- Out-of-plumb adjustability
- Tempered glass ensures maximum safety and durability
- Anodized aluminum prevents rusting and corrosion

Installation

- Not for use in hospitality.
- For residential use only.

Included Components

Additional Components: Hardware kit

Framed Sliding Shower Door

Deluxe

5960-48

Codes/Standards ANSI Z97.1 CPSC 16CFR 1201

STERLING[®] Warranty - Bath and Shower Doors See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


S

Available Glass Options Code Description

Pebbled





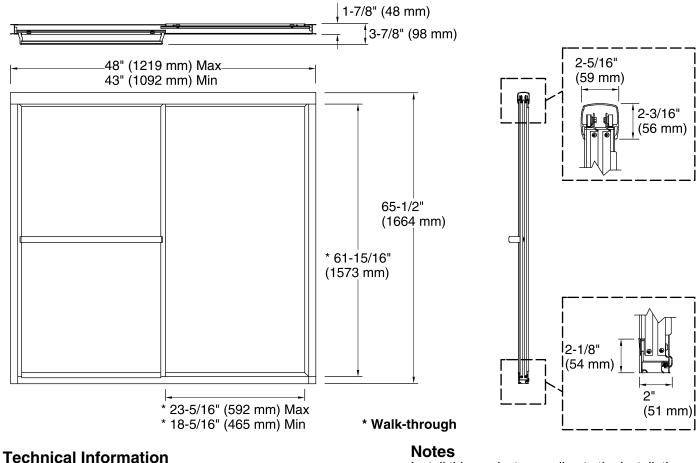

All product dimensions are nominal.

Installation type: For shower base installation Opening Width - Min: 43" (1092 mm) Opening Width - Max: 48" (1219 mm) Walk-through - Min: 18-5/16" (465 mm) Walk-through - Max: 23-5/16" (592 mm) Glass thickness: 1/8" (3 mm)

Install this product according to the installation guide.

The vertical opening should be a minimum of 67" (1702 mm) to allow for installation clearance.