# Parallel™



Rite-Temp™ shower trim kit with lever handle,1.75 gpm

K-TS23503-4G

### **Features**

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- Single-function 1.75 gpm (6.6 lpm) showerhead with Katalyst™ air-induction technology
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup
- Coordinates with other products in the Parallel collection

#### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

## Technology

 Katalyst™ air-induction technology infuses water with air, creating bigger drops for a more powerful spray

### Installation

 Trim only; requires valve to complete installation (sold separately)

### **Included Components**

Additional Components: Shower arm and flange







### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense™ California Energy Commission (CEC)

# **KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant™ Brushed Nickel
	BL	Matte Black
	2MB	Vibrant™ Brushed Moderne Brass






# Parallel™

Rite-Temp™ shower trim kit with lever handle,1.75

gpm

K-TS23503-4G

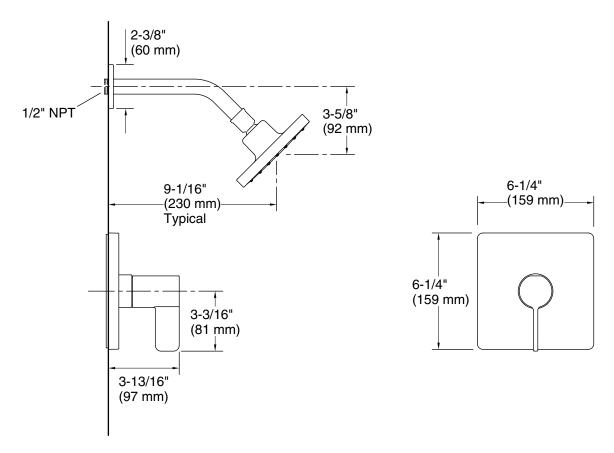

### **Technical Information**

All product dimensions are nominal.

Drain included: No

## **Showerhead/Body Spray:**

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 45 psi (3.1 bar)

### **Notes**

Install this product according to the installation instructions.

