

JACOBEAN

Features

- Solid brass construction
- ADA compliant traditional cross handles
- 8-5/16" (21.1 cm) spout length
- 1/2" NPT spout inlet fitting
- Intended for use with Newport Brass rough valve as specified (Required Accessory)
- Rough valve incorporates a brass valve body assembly
- Rough valve incorporates quarter-turn washerless ceramic disc valve cartridges

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- ADA
- ICC/ANSI A117.1
- All applicable US Federal and State material regulations

Wall-Mounted Tub Trim

3-2465











Colors / Finishes

10B: Oil Rubbed Bronze15: Polished Nickel15S: Satin Nickel - PVD26: Polished Chrome

 Other: Refer to the Newport Brass catalog for additional color/finish options.

Specified Model Model Description Colors | Finishes 3-2465 Wall-Mounted Tub Trim 10B 15 15S 26 Other

Required Accessory:		Both trim, above, and rough valve, below, must be specified.		
Application	Tub Only Valve*	Wall Lavatory Valve	Tub Only Valve*	Wall Lavatory Valve
Description	2-Cartridge Assembly with 16pt Spline		2-Cartridge Assembly with 20pt Spline	
Inlet/Outlet Size	1/2"	1/2"	1/2"	1/2"
Part Number	1-500	1-532	1-564	1-560
Image				


^{*} Plumbing code restrictions prohibit the use of the 1-500 for showers unless the 1-535 (Remote BP Valve) is installed upstream of the 1-500.

Product Specification Add "Color / Finish" suffix to Model number, below.

The Wall-Mounted Tub Trim shall be made of solid brass construction. Wall-Mounted Tub Trim shall include ADA compliant cross handles and a 8-5/16'' (21.1 cm) tub spout that incorporates a 1/2'' NPT inlet fitting. Wall-Mounted Tub Trim shall be Newport Brass Model $3-2465/__$ and Newport Brass rough valve shall be 1-500.

3-2465

PRODUCT DIMENSIONS (Units are in inches)

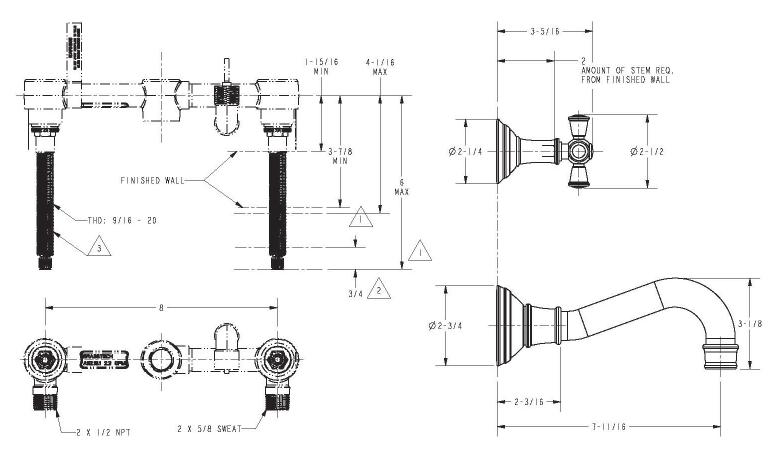

NOTES:

I. CUT STEM AS SHOWN.

CUT ALL THREADS 3/4" SHORTER THAN STEM

3. PN: I-500 TO BE SOLD SEPARATELY.